

ELASTOMERS

Europrene®

SOL R

S-SBR



versalis



Europrene[®]

SOL R S-SBR

BACKGROUND

Solution polymerized SBR (S-SBR) was developed in the 1960's as an alternative to emulsion SBR (E-SBR). It offers many advantages, including the ability to manufacture tailor made polymers for the tyre industry and other markets, in terms of micro and macro structure. Versalis R&D based in Ravenna, Italy, has refined these products to create an extensive portfolio.

PROCESS

Solution polymerized styrene-butadiene rubber is obtained by the anionic polymerization of styrene and butadiene initiated by lithium alkyls in hydrocarbon solvent. The distribution of the styrene units in the polymer chain results in Random copolymers. This is controlled by the use of a suitable modifier. The finishing process consists of solvent stripping and stabilization with non-staining antioxidant(s). The resultant polymer crumb is then dried, baled, packaged.

SUSTAINABILITY

All grades in portfolio are available with ISCC Plus Certification through Mass Balance approach: "Bio Attributed (BA)" and "Bio-Circular Attributed (BCA)" products are obtained using bio naphtha. "Circular Attributed (CA)" grades are made using "recycled oil" (r-Oil), a pyrolysis product obtained from the chemical recycling of mixed plastic waste. BA, BCA and CA raw materials can be used in production processes together with traditional raw materials. In order to increase the sustainability level of the final product.

Grades obtained through the Mass Balance approach show identical performance, quality and properties vs corresponding traditional grades, as they do not differ in chemical composition and process technology.



MAIN PROPERTIES

Random S-SBR are used in different applications. Random S-SBR provide a versatile platform for the manufacturing of a “tailored” product by varying macro and microstructure. This means that polymers can be produced with different glass transition temperature (T_g), which in turn will influence important properties such as good processability, rolling resistance, grip and abrasion. These properties make random S-SBR particularly useful in the tyre sector. Random S-SBR technology can be further enhanced by the use of polymer chain coupling, and functionalization.



GRADE SELECTION

S-SBR are produced at Ravenna-Italy facilities.

Functionalized Europrene®

Product portfolio is expanding to functionalized S-SBR grades for silica, produced by batch technology with improved performance

- Europrene® SOL R 72616: provides improved rolling resistance.
- **AGON® SOL R X FZ595 and FZ360: new generation functionalized grades** with improved rolling resistance, wet grip and abrasion resistance. Designed summer, winter and all-season tyres. FZ360 is a low Tg grade.




GRADE LIST


Functionalised random types

GRADE	BOUND STYRENE %WT	VINYL CONTENT ⁽¹⁾ %WT	MOONEY VISCOSITY ML (1+4) 100 °C
Europrene® SOL R 72616	21	63	68
Agon® SOL R X FZ 360	15	32	60
Agon® SOL R X FZ 595	27	59	61

(1) Referred to butadiene portion

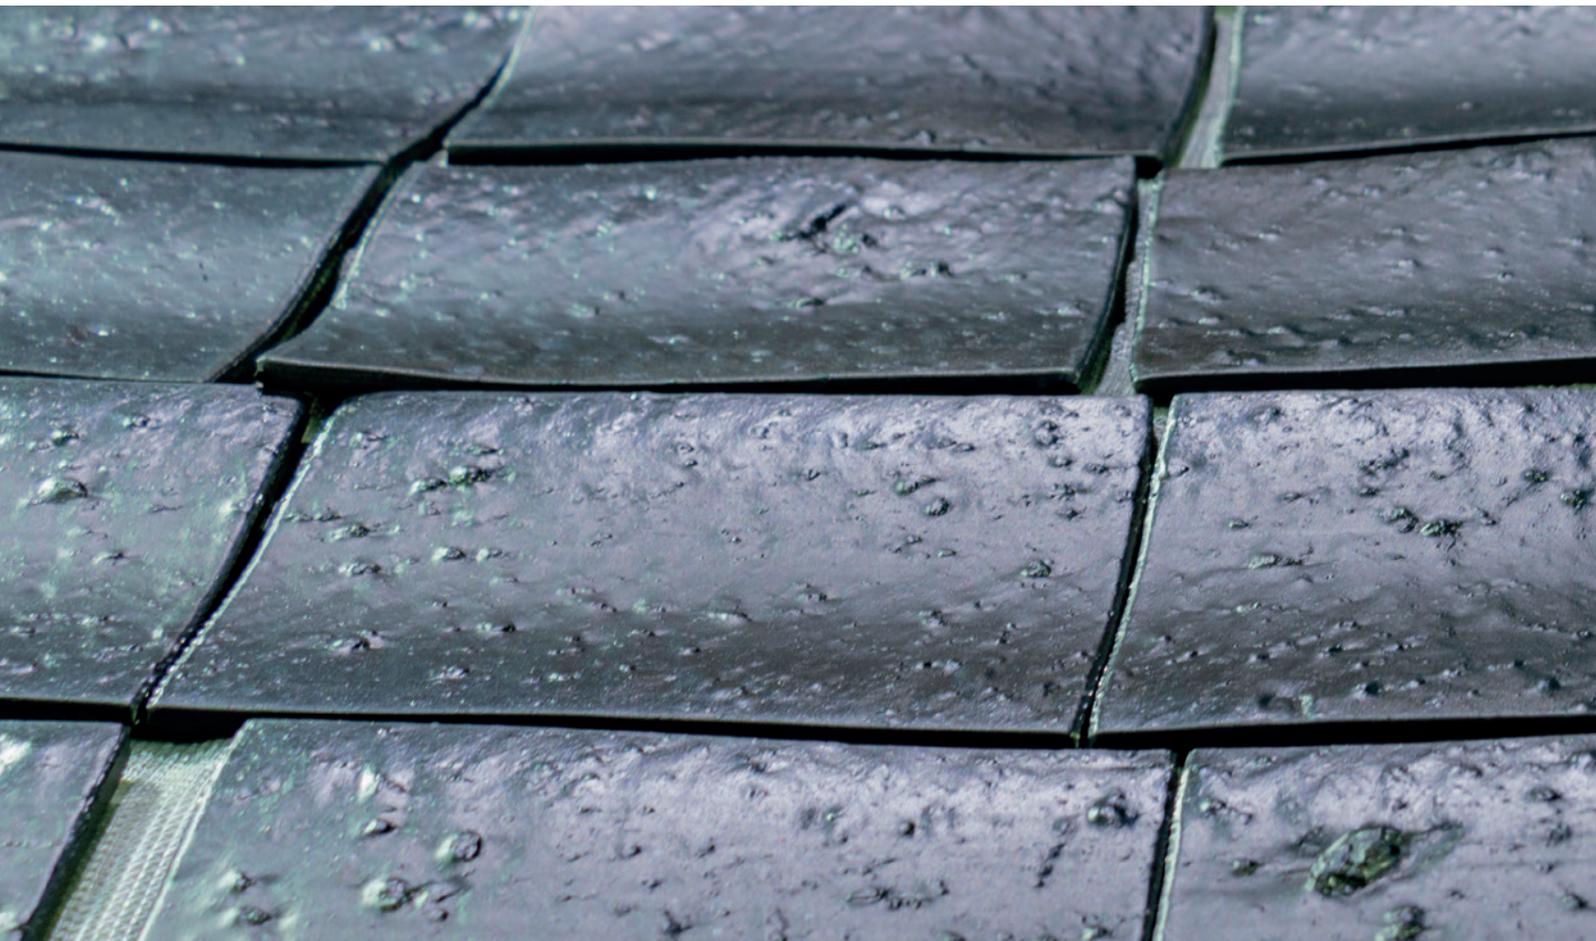

OIL		P.H.R.	MAIN APPLICATIONS
TYPE			
-	-	-	Functionalised for silica premium tyre treads compounds with low rolling resistance
-	-	-	New generation low Tg functionalized polymer. Main applications: silica- based compounds for winter and all season tyres.
-	-	-	New generation functionalized polymer. Main applications: silica- based compounds for premium tyres, in particular summer and all- season types

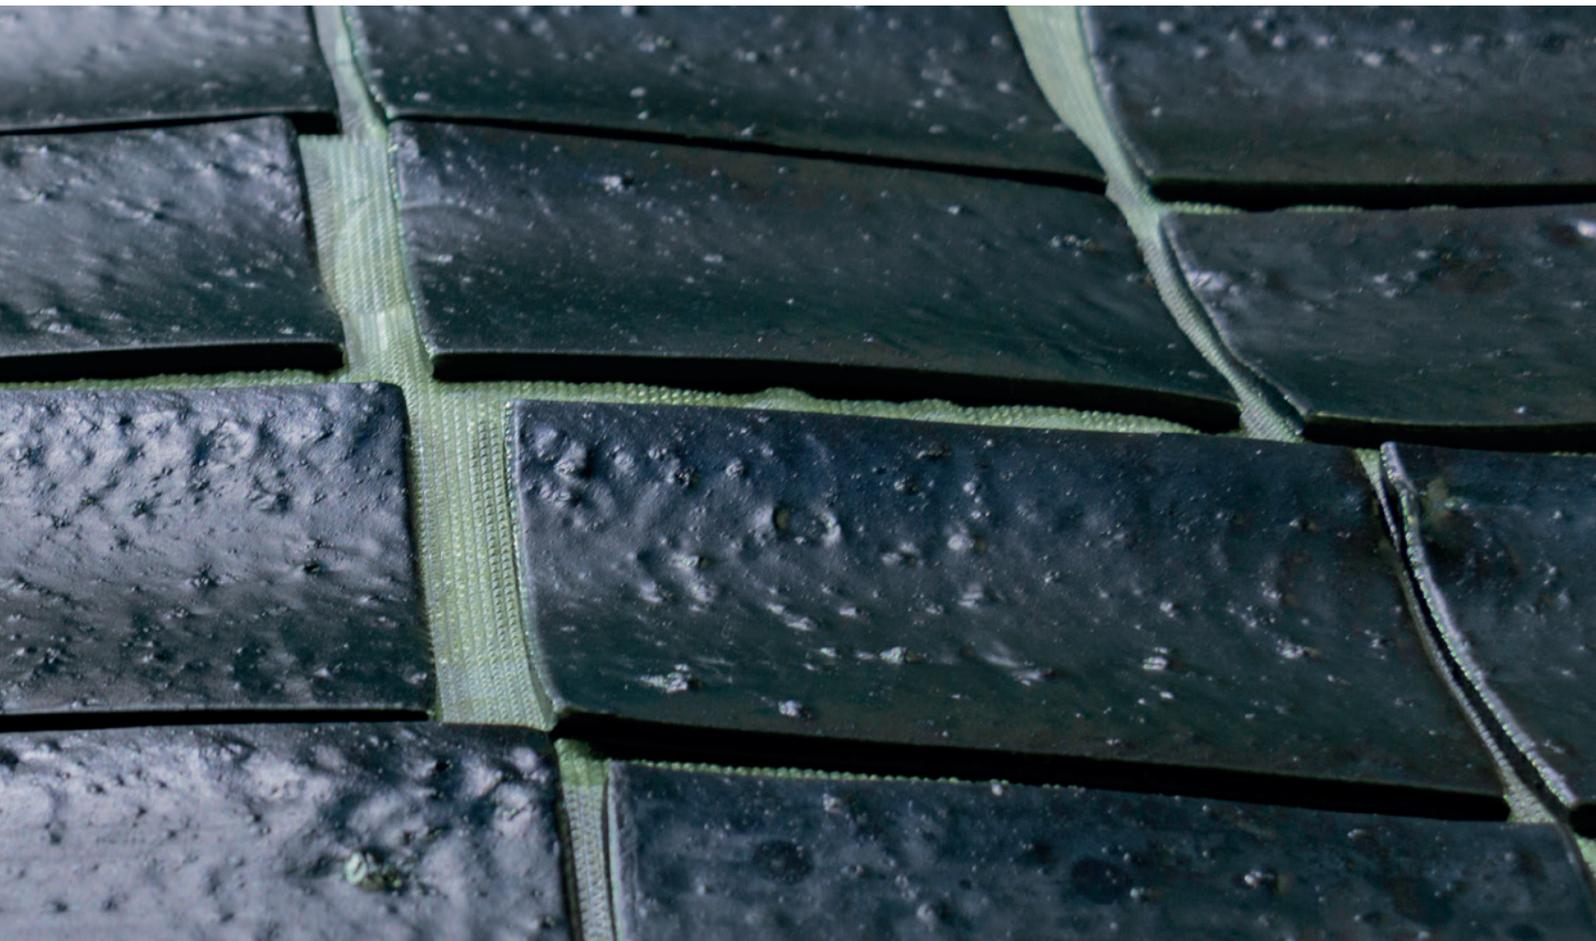

STORAGE AND PACKAGING


The Europrene® and Agon® SOL R grades should be stored in a vented, dry area at a temperature between 20°C and 30°C with the avoidance of exposure to direct sunlight. The shelf life of Europrene® and Agon® SOL R grades is 12 months minimum.

GRADE	PACKAGING	DIMENSION (mm)	NOMINAL NET WEIGHT (kg)	
Agon® SOL R X FZ 360	Returnable metal crate	1465x1150xH1123	1260	
Agon® SOL R X FZ 595	Returnable metal crate	1465x1150xH1123	1260	
Europrene® SOL R 72616	Returnable metal crate	1465x1150xh1123	1260	




	PHYSICAL FORM	BALE DIMENSION (mm)	BALE WEIGHT (kg)	BALES TOTAL	BALES X LAYER	FILM TYPE
	Bales	660x350xh200	35	36	6X5	PE
	Bales	660x350xh200	35	36	6X5	PE
	Bales	660x330xh200	35	36	6x6	PE

Versalis in the world

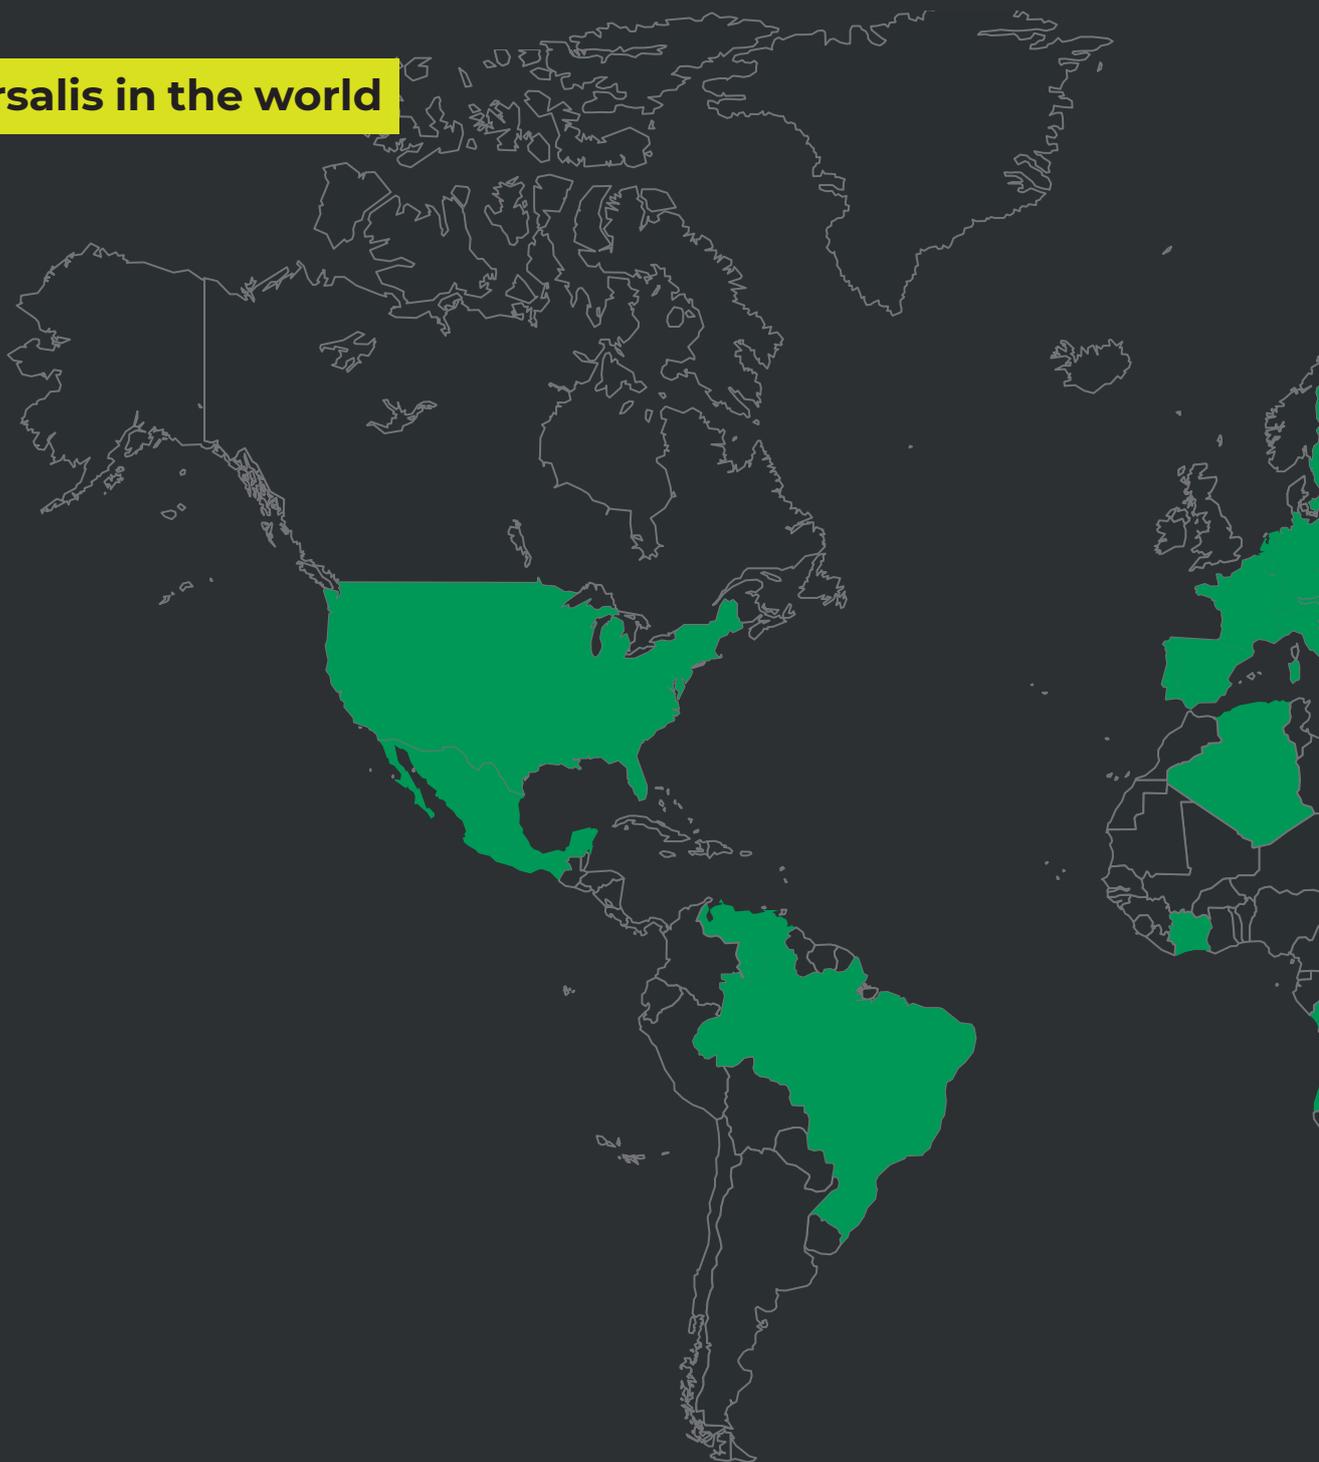

Versalis is focused on establishing itself as a solution provider, offering a range of increasingly market-oriented products at an international level. The company is present in the APAC region through its Shanghai-based subsidiary, Versalis Pacific Trading; in Mumbai, India; in Singapore; and in South Korea through LVE, a joint venture with Lotte Chemical.

Versalis can also count on subsidiaries Versalis Americas – with offices in Houston, Texas – and Versalis Mexico. Furthermore, Versalis serves the oil and gas industry with offices in Ghana and in Congo, with its portfolio of oilfield chemicals. Thanks to a widespread sales network, distributors and sales agents, Versalis can serve all markets worldwide.

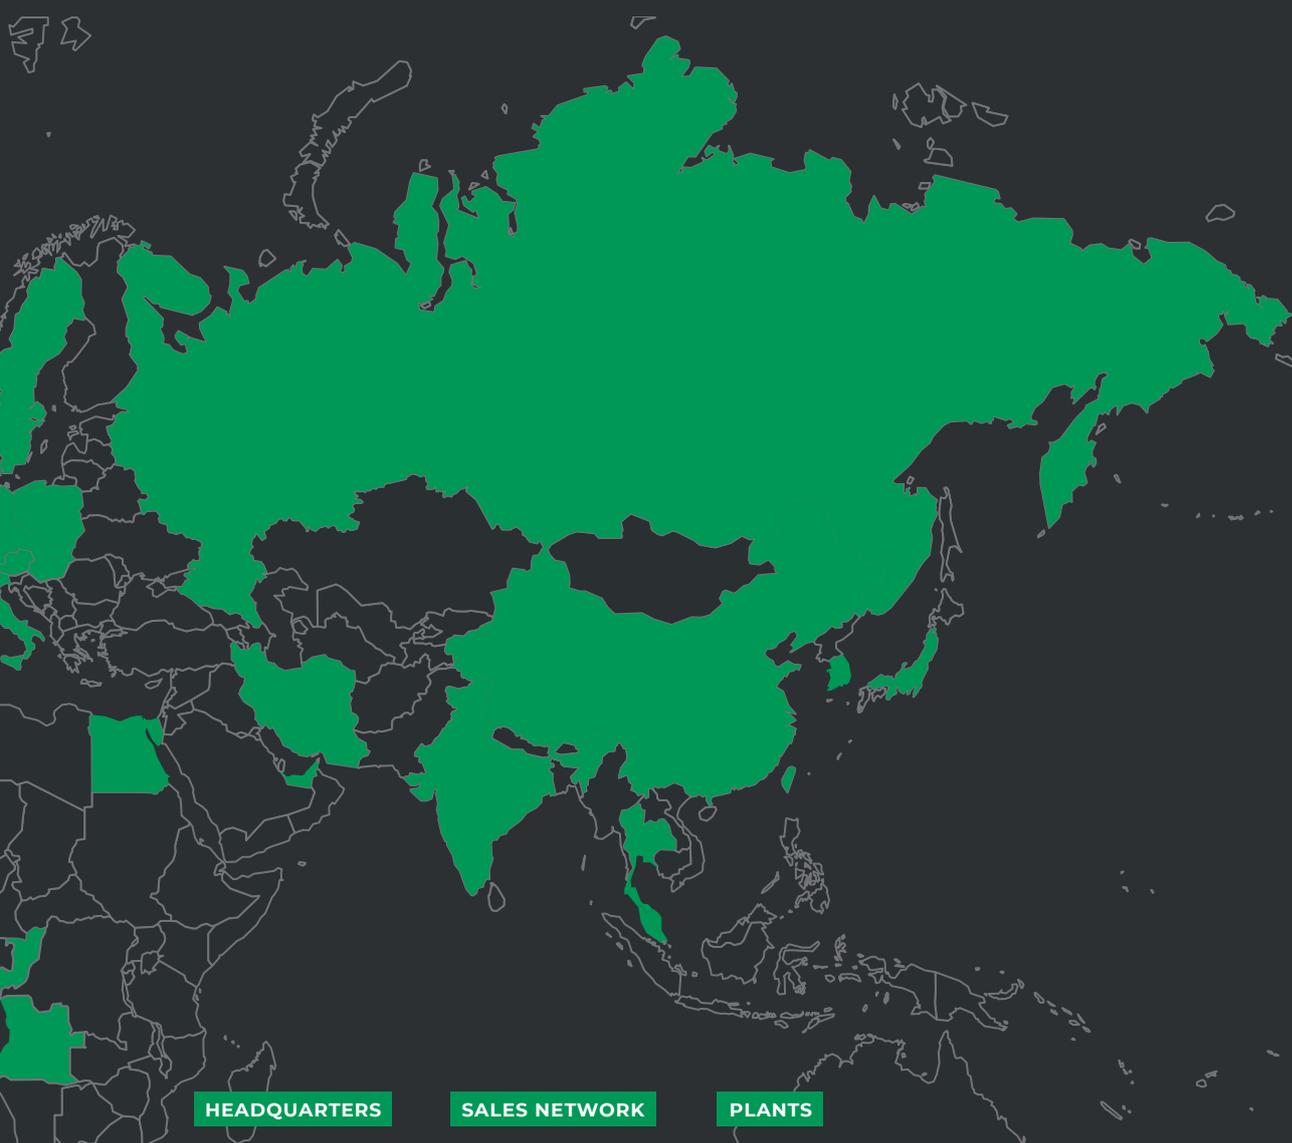

HEADQUARTERS

San Donato Milanese, Milan (Italy)

LICENSING

Algeria
Brazil
China
Egypt
India
Iran
Japan
Malaysia
Portugal
Qatar
Romania
Russian Federation
Slovak Republic
South Korea
Spain
Taiwan
USA
Venezuela

R&D

ITALY
Ferrara
Mantua
Novara
Porto Torres
Ravenna
Rivalta Scrivia

SALES NETWORK

Austria
Belgium
China
Congo
Czech Republic
Denmark
France
Germany
Ghana
Greece
Hungary
India
Italy
Mexico
Poland
Portugal
Romania
Russian Federation
Singapore
Slovak Republic
South Korea
Spain
Switzerland
Sweden
Turkey
United Arab Emirates (VPM, a joint venture with Petrochem/Mazrui Energy Services)
UK
USA

PLANTS

ITALY
Brindisi:
- Steam cracking
- Aromatics
- Polyethylene
Crescentino:
- Bio-ethanol
Ferrara:
- Elastomers
- Polyethylene
Mantua:
- Intermediates
- Styrene
- Styrenics
Porto Marghera:
- Recycled polymers
Porto Torres:
- Elastomers
- Renewable chemistry
Priolo:
- Steam cracking
- Aromatics
Ragusa:
- Polyethylene EVA
- Butadiene
Ravenna:
- Elastomers

FRANCE
Dunkerque:
- Steam cracking
- Polyethylene EVA

GERMANY
Oberhausen:
- Polyethylene EVA

HUNGARY
Százhalombatta:
- Styrenics

SOUTH KOREA
Yeosu (LVE, a joint venture with Lotte Chemical):
- Elastomers



versalis

Versalis spa

Piazza Boldrini, 1
20097 San Donato Milanese (MI) - Italy
Ph. 0039 02 520.1

info.elastomers@versalis.eni.com
versalis.eni.com

Technical service

technicalmanagement@versalis.eni.com

